


NELEO 90 & NELEO 125 - DETAILS


NELEO 90



Sleep mode

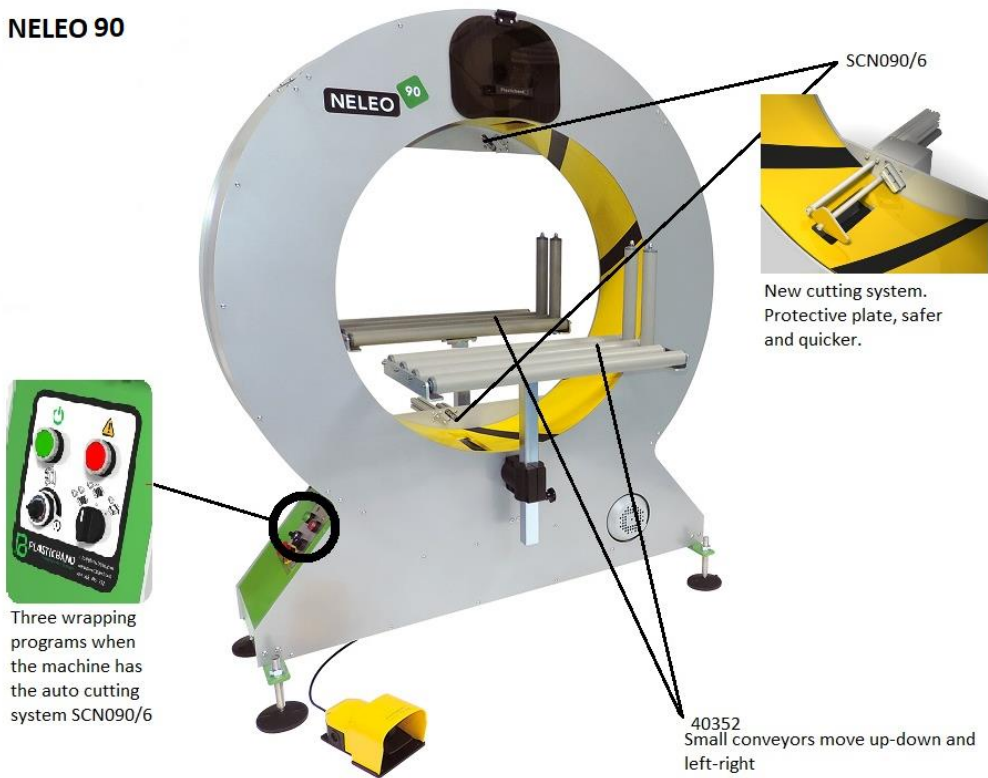


Collection, clamping and cutting mode



Easy access to reel holder to change film.



Movement of the ring to position the reel holder is done by hand by moving the ring from the outside protective yellow cover

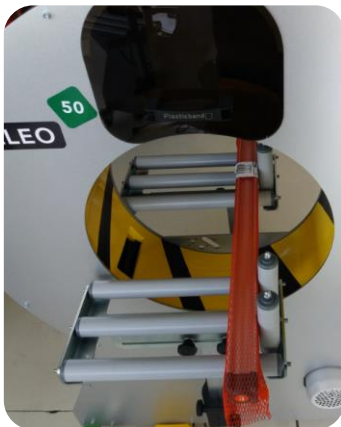

Small table with vertical rollers can be positioned up & down – left & right. Adapted to your wrapping needs depending on the product you have.



Tension is done directly on the reel holder.

Manual.

NELEO 125



Touch screen and Emergency button at the front of the machine for better accessibility.



Explanatory gifs to help the operator in daily operations and guide "how-to-do".

3 customizing programs
4 standard programs




NELEO 125 / NELEO 160
Semiautomatic orbital wrappers
PLASTICBAND
Customized Strapping & Wrapping

Electrical cabinet inside the machine for better protection and better adaption to working space.




Double roll of stretch film and double auto cutting system.
Knives protected by a plate for better safety.

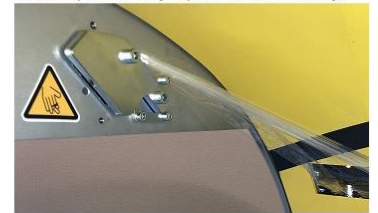


TOUCH SCREEN

Warning and explanatory gifs standard in the software to inform and guide the operator.




Door to access the stretch film rolls.

Automatic positioning by software for daily operation of stretch film replacing.

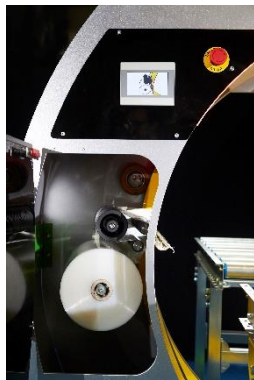

Tension is done directly on the reel holder.

Manual.

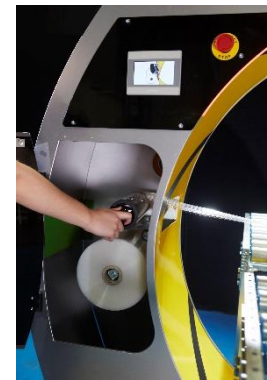

A gif advises the operator when **maintenance** must be done, it facilitates preventive maintenance, avoiding unexpected stoppages.



Possibility to block the screen with a programmable PIN, avoiding inappropriate manipulations from external or not authorized operators. Although the screen is blocked, the user has access to the basic wrapping functions.




Electrical cabinet integrated inside the machine for easy fitting in any packaging space.

GRAVITY CONVEYORS AND ACCESSORIES



Example of gravity pvc roller conveyor (casters not quoted, optional)
 Usually the same length at the infeed and outfeed side, to cover the total of the maximum product length.
 Support until 50 Kg / linear meter – Gap between rollers: 150 mm – Diameter of PVC rollers: 50 mm

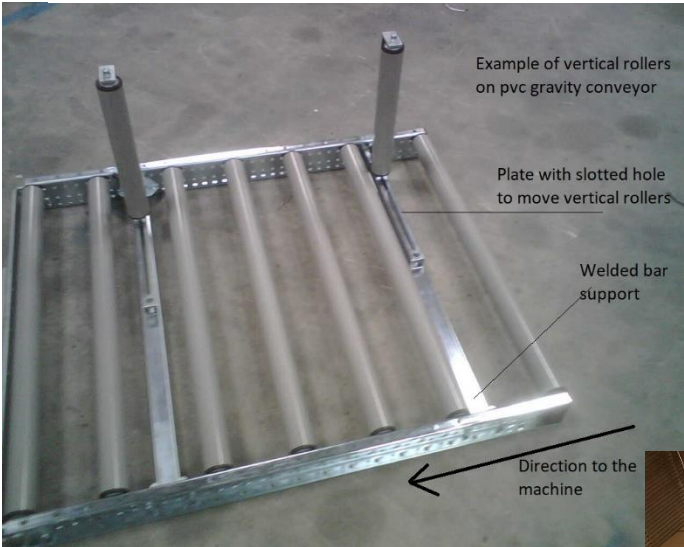

Example of vertical rollers on a gravity pvc roller conveyor.
 Vertical rollers can move towards the center of the conveyor sliding by a guide.
 Distance between vertical rollers should be informed before manufacturing because the guides are welded to the conveyor structure.

Example of “V shape” vertical rollers on a gravity pvc roller conveyor.
 For round products or bundle of tubes, etc.. that have to be hold before wrapping.
 Vertical rollers can move towards the center of the conveyor sliding by a guide.
 Distance between vertical rollers should be informed before manufacturing because the guides are welded to the conveyor structure.



PRODUCTION TIME (Factory)

Neleo 90 with or without gravity conveyors: average of 3 weeks from receiving the down payment.

Neleo 125 with or without gravity conveyors: average of 3 weeks from receiving the down payment.

Conveyors with accessories: add 2 more weeks to the above informed production time.

Basic standard configuration:	
311.42/125 Halbautomatische horizontale Einwickelmaschine mod. NELEO 125, 230V I 50 Hz	
SCN125/6 Stretchfolie auto Schneidsyst, Ring Geschwindigkeitsregl., TouchPanel	Auto cutting system with Touch screen to manage the programs, speed, reinforcement laps, positioning to change the film, etc...
F25.23.1500 Stretchfolie roll Farblos, dehnbar 215%, Breite 25cm., Stärke 23mμ Size of film for Neleo and Atis 125, 160, 200, 250.	Our stretch film has a core of 38mm. A full pallet for F25 is 96 rolls. In case you don't need a full pallet, please advise. A minimum quantity of a single box is mandatory to accomplish our warranty.
311.42/090 Halbautomatische horizontal Einwickelmaschine mod. NELEO 90, 230V I 50 Hz	
SCN090/6 Doppel aut. Schneidsystem 2 Folie Rollen	Auto cutting system. Neleo 50 and Neleo 90 have a selector with three wrapping programs when they are ordered with auto cutting system.
40352 Tisch mit Schwerkrafrollen B 700 x 230 mm	Small roller table attached to the wrapper, it includes vertical roller for side support while wrapping. This table can be moved up & down and left & right. Can be combined with longer gravity conveyors if needed.
F17.23.1300 Stretchfolie roll Farblos, dehnbar 215%, Breite 17cm., Stärke 23mμ Size of film for Neleo and Atis 90	Our stretch film has a core of 38mm. A full pallet for F17 is 168 rolls. In case you don't need a full pallet, please advise. A minimum quantity of a single box is mandatory to accomplish our warranty.
CONVEYORS AND ACCESSORIES	See different dimensions and details in the offer.