

stretchfolienprofi



PALLET STRETCH

HL300

It is for wrapping heavy pallets. This item should be used by elongating minimum %200

Specifications

- > It has high ability to wrap pallet and goods.
- > As standard; machine roll 23 micron.
- > Dart impact and puncture resistance has been improved.
- > Depending on machine speed; it has ability to elongate up to %300.
- > Material is clear and has high clarity.
- > Can be produced as colored unless quantity is higher than min. Qty
- > Over 23 micron can resist sunlights around 6 months.
- > Can be produced 12 months sunlight resistant film with 12 months UV upon request.

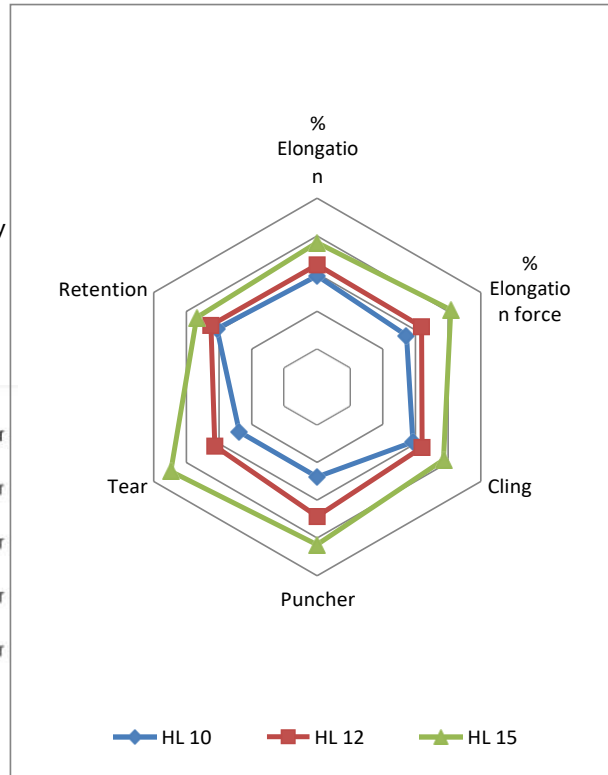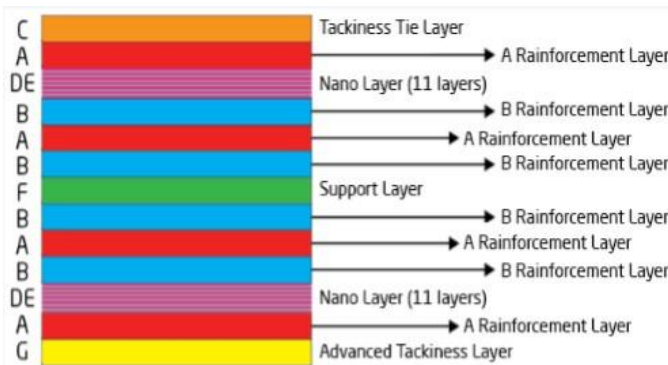

FILM PARAMETERS

Specification	Unit	Performance			Test Standard	
Thickness	micron	10	12	15	SFP Test	
% Elongation	%	200	220	260	SFP	ESTL Test
% Stretch break force	N	82	96	110	SFP	ESTL Test
%200 Puncture resistance	N	16	23	28	SFP	ESTL Test
%200 Tear	sn	1,6	2,1	3	SFP	ESTL Test
%200 Retention	N	9,9	10,6	12	SFP	ESTL Test
%200 Cling	N	0,31	0,34	0,41	SFP	ESTL Test

The specific film properties were our laboratories test results which were manufactured under standard internal conditions. Use of our products is due to conditions beyond our control variables, these values are outside the scope of warranty.

EXPLANATIONS

SFP stretch film series can -in principle be used in food contact applications in various EU Member States and in the USA(FDA). Please contact SFP representative for more detailed information and/or actual compliance certification documents for