

Basic configuration: Machine + small roller tables + auto cutting system

311.42/050 Semiautomatic orbital wrapping machine mod. NELEO 50, 230V | 50 Hz

2 u. 40348

Gravity rollers table W400 x L230mm + vertical rollers

1 u. SCN050/6

Stretchfilm automatic cutter system for 2 reels


With auto cutting system



3 programs button



Selector con tres programas de embalaje solamente se incluye cuando se fabrican la envolvedora con el sistema de corte.

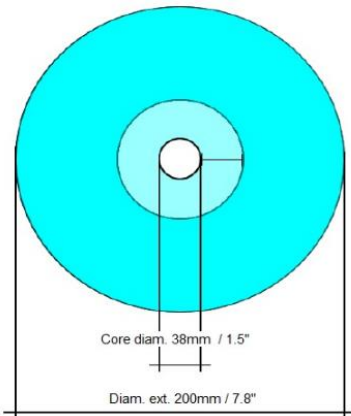


PLASTICBAND STANDARD
CORE: 38 mm
REEL HOLDER PREPARED FOR 38mm CORES
MORE STRETCH FILM IN EACH ROLL
LESS STOPS FOR REPLACING FILM
MORE PRODUCTIVITY

FILM F10.2301300

F10.2301300 Stretchfilm reel Colorless, stretching 215%, wide 10cm., thickness 23µm
Stretch film rolls adapted to our reel holders for diam. 38mm core


Auto cutting knives protected by a plate for operator's safety.

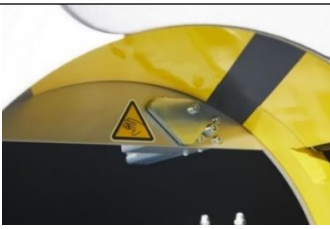

Small roller table with vertical rollers. Moves up & down – left & right. Used as a side support while wrapping



Double stretch film roll system. Up and down. More speed, less film replacement frequency.

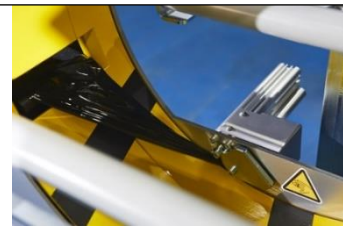


Selector with three wrapping programs when ordered with auto cutting. *Auto cutting needs an external compressed air supply.



Wrapper managed by a pedal.



Stretch film roll replacement by moving the ring manually by the external side. Film tension, manual adjustment directly on the reel holder set.

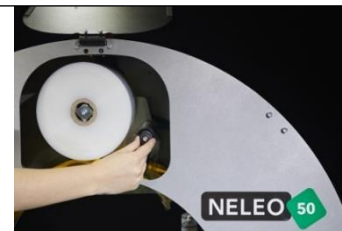

OPTION:


50757 Vertical PVC side gravity rollers to install in the gravity conveyors type RGxxxxPZ. These rollers have a support base to the conveyor's frame and a slotted hole to move them towards the center of the conveyor. These rollers are used as a side support.

Examples of gravity pvc roller conveyor type RGxxxxPZ (casters not included, optional).

Same length of conveyors at the infeed and outfeed side, to cover the total of the maximum product length.


Gravity conveyors specs:

Support until 50 Kg / linear meter – Gap between rollers: 150 mm – Diameter of PVC rollers: 50 mm

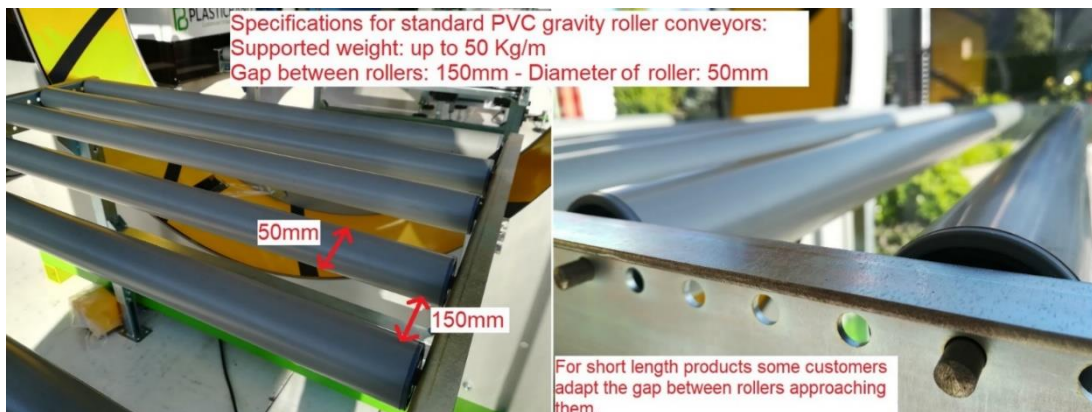

Specifications for standard PVC gravity roller conveyors:
Supported weight: up to 50 Kg/m
Gap between rollers: 150mm - Diameter of roller: 50mm

For short length products some customers adapt the gap between rollers approaching them.

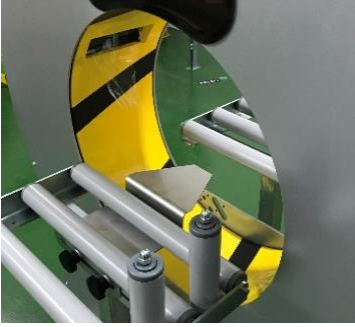

181977 Small products bridge, fixed metal plate attached to the 40348.
50640 Small products bridge, fixed metal plate attached to the pvc gravity roller conveyors type RGxxxxPZ.
 Helps operators to support short products while wrapping.



50720 Wheels with brake (Set of 4 units) Option.



40291
 Top presser – 2 units
 Manual adjustment



Packing of machines for shipments.
 Standard: Machine on a pallet, secured with strap and wrapped.
 Recommended for sea freight: Wooden boxes